

Unless otherwise specified: All Dimensions are in millimeter (mm)



# Product Data Sheet



**FD-5080SB**  
Parking & Area Drain  
Square Grate with  
Bucket

Standard: ASME A112.6.3-2001

Bottom Outlet

Grate Free Area  
324 cm<sup>2</sup>



## Features

- Parking & Area Drain, suitable with:
  - ASTM Standard pipe: 3", 4", & 6"
  - Metric pipe: 75mm, 110mm, & 160mm
- Bottom Outlet.
- Large sump Body with 15" (381 mm) flange dia.
- Inside Gasketed connection or No Hub (Coupling) Connection (3", 4" & 6") as per DIN and ASTM pipe size.
- Clamp (When used with water proofing system).
- Seepage Holes for any seepage around the drain (When used with water proofing system).
- Sediment Bucket.
- Extra heavy duty hinged Square Grate.

## Materials

- Body, clamp, and bucket: Gray Cast Iron.
- Square grate: Ductile Iron.
- Bolts: Stainless Steel

## Dimensions


As per Drawing

## Surface Finish

- Cast iron parts: Epoxy Coating
- Ductile Iron Parts: Epoxy Coating



The Industrial Company for Casting and Sanitary Fittings  
PO Box 3505, Riyadh - 11481, Saudi Arabia Email: drains@saudicast.com  
Tel: +966 11 448 0107 Ext: 260 / 263 Fax: +966 11 446 4976 www.saudicast.com

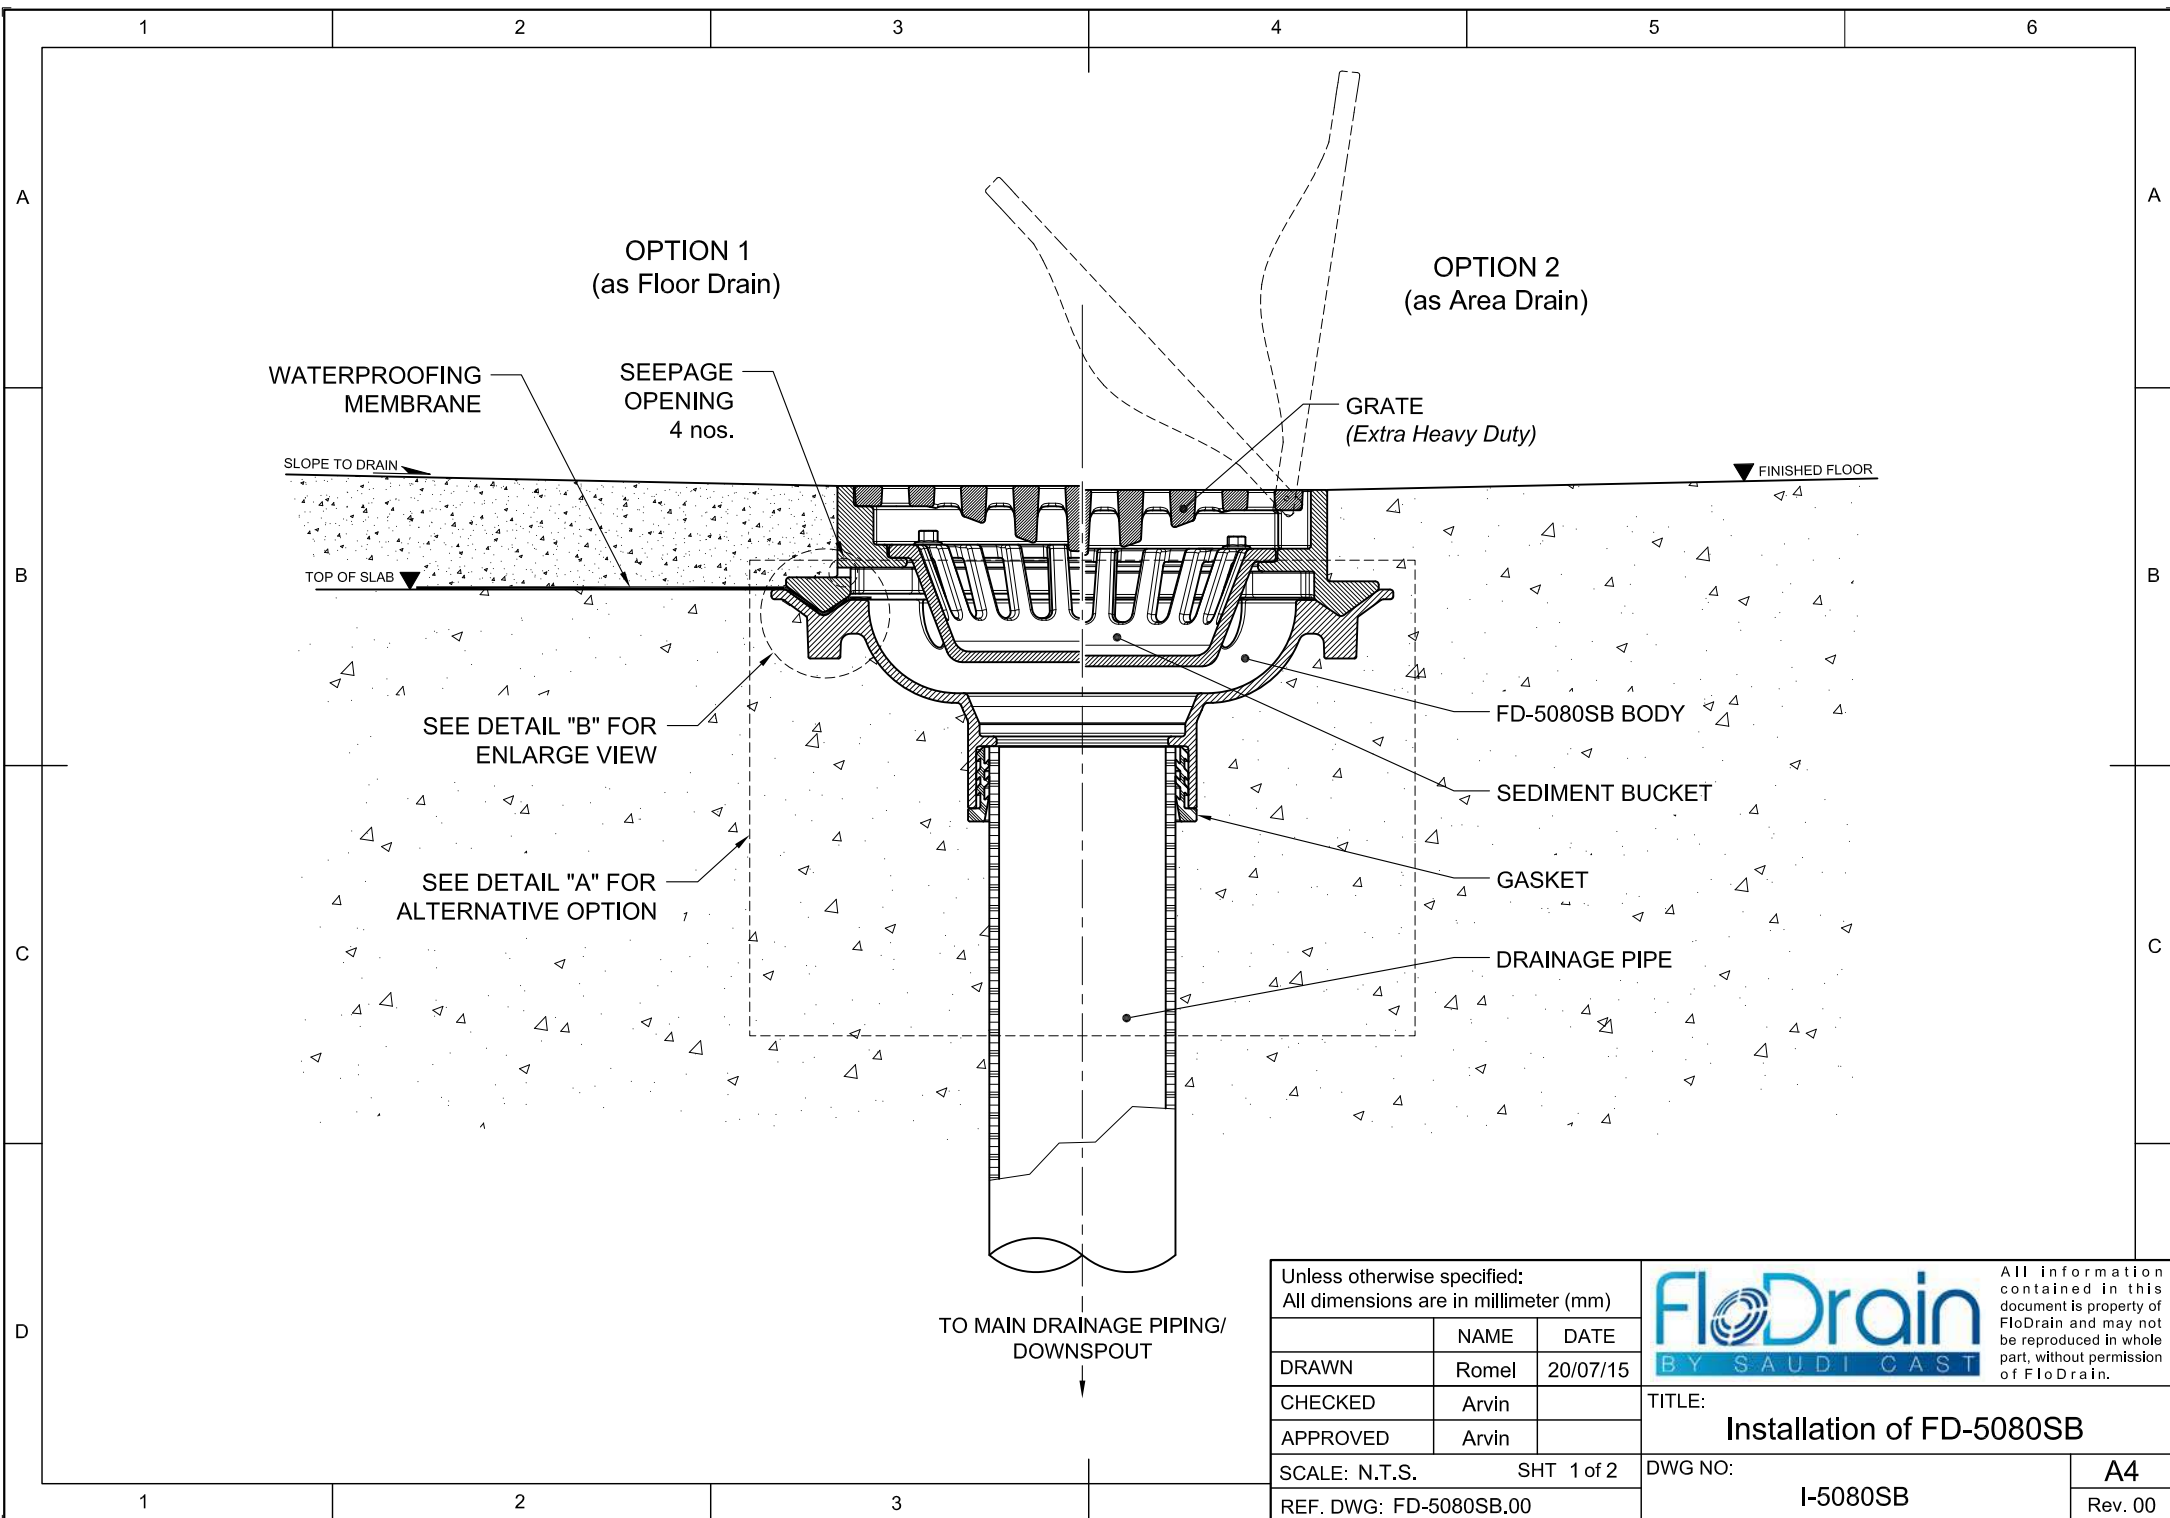

Unless otherwise specified: All dimensions are in millimeter (mm)		
	NAME	DATE
DRAWN	Romel	20/07/15
CHECKED	Arvin	
APPROVED	Arvin	
SCALE: N.T.S.	SHT 1 of 2	
REF. DWG: FD-5080SB.00		

All information contained in this document is property of FloDrain and may not be reproduced in whole part, without permission of FloDrain.

TITLE: <b>Installation of FD-5080SB</b>	
DWG NO: <b>I-5080SB</b>	<b>A4</b>
	Rev. 00